

SMART WALLBOX 1 CABLE+SOCKET T2 7,4kW PM

205.W23-S0



FEATURES

- Charge in mode 3 with pwm circuit pilot
- Energy metering and current consumption
- Power contactor aperture monitoring
- Charge managing in case of power outage
- Working in mode stand-alone free
- Predisposition for serial communication
- POWER MANAGEMENT function (automatic modulation of charge current depending contractual power and power used by house).


EQUIPMENT

- 1 terminal strip 3x10mm²
- 1 modular contactor 2P 40A 24Vdc
- 1 DC Leakage detector
- 1 fuse holder 1P+N gG 4A
- 1 power supply 24Vdc 36W
- 1 control card
- 1 lcd display 2x20 rows backlight
- 1 RBG led stripes
- 1 stop charge push-button (mode free)
- 1 cable holder in technopolymer
- 1 cable 3G6+1x0,5mm² 4m
- 1 backup battery
- 1 digital energy meter 1P+N 40A
- 1 digital energy meter 1P+N 80A (external)

EXCLUDED

- 1 circuit breaker 1P+N C40 30mA ist. A
- 1 shunt trip release 24Vdc

SIZE

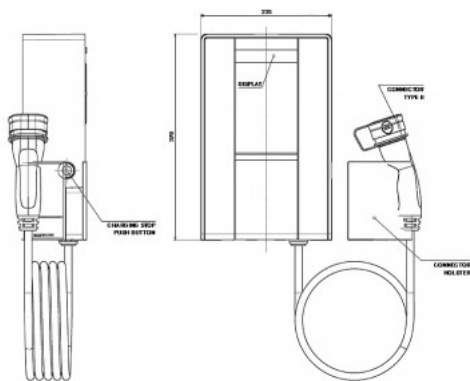

TECHNICAL SPECIFICATIONS

PROTECTION DEGREE IP	IP54
WORKING FREQUENCY	50/60Hz
RATED VOLTAGE	230V
POLES	1P+N+E
MOUNTING VERSION	SURFACE MOUNTING
MATERIAL	ENGINEERING PLASTIC
SYNTHETICAL DESCRIPTION	WALL BOX 1 SOCKET TYPE 2
GLOW WIRE	GW 650°C
PROTECTION DEGREE IK	IK08
RATED CURRENT	32A
EV STANDARD	Type 2 1P+N+E 32A 230V~ 7,4kW

WORKING TEMPERATURE	-30°C/+50°C
COLOUR	ANTHRACITE
COMMERCIAL SERIES	BE-W Series
DIMENSIONS	235x370x115mm