

PRODOTTO

# WALL BOX 1 SOCKET TYPE 2 22kW TA+LCD+DC

205.W18-D0

Wall Box in Halogen-free engineering plastics, for wall assembly, equipped with a Type 2 socket, 3P+N+PE 32A 400Vac 22kW, with LCD display and fitted with safety shutters in compliance with standard IEC/EN 62196-2.

Suitable for electric vehicle charging in «mode 3» in compliance with standard EN61851-1. BASIC-FREE version ideal for domestic charging in total safety.

Exclusive design with «dual Feel Sensitive» finish, highly resistant to UV rays, high-level IP54 protection against dust and water with the possibility for personalisation.



## FEATURES

- Charge in mode 3 with pwm circuit pilot
- Identification of connected cord-set size
- Protection against direct contact Safety Child Shutters
- Current consumption metering
- Managing of latching system
- Charge managing in case of power outage
- Working in mode stand-alone free
- Predisposition for serial communication


## EQUIPMENT

- 1 terminal strip 5x10mm<sup>2</sup>
- 1 current transformer
- 1 modular contactor 4P 40A 24Vdc
- 1 DC Leakage detector
- 1 fuse holder 1P+N gG 4A
- 1 power supply 24Vdc 36W
- 1 control card
- 1 lcd display 2x20 rows backlight
- 1 RGB led stripes
- 1 stop charge push-button (mode free)
- 1 backup battery

## EXCLUDED

- 1 circuit breaker 3P+N C40 30mA ist. A

## SIZE

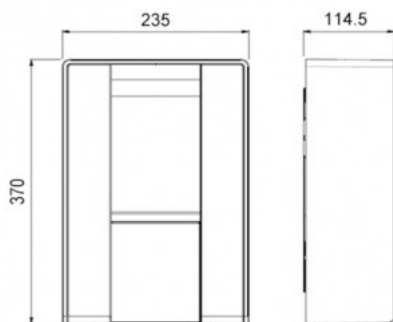

## TECHNICAL SPECIFICATIONS

PROTECTION DEGREE IP	IP54
WORKING FREQUENCY	50/60Hz
MOUNTING VERSION	SURFACE MOUNTING
MATERIAL	ENGINEERING PLASTIC
SYNTHETICAL DESCRIPTION	WALL BOX 1 SOCKET TYPE 2
GLOW WIRE	GW 650°C
PROTECTION DEGREE IK	IK08
RATED VOLTAGE	400V
POLES	3P+N+E
RATED CURRENT	32A

EV STANDARD

Type 2 3P+N+E 32A 400V~ 22kW

---

WORKING TEMPERATURE

-30°C/+50°C

---

COLOUR

ANTHRACITE

---

COMMERCIAL SERIES

BE-W Series

---

DIMENSIONS

235x370x115mm

---