

PRODOTTO

WALLBOX BE-W CABLE+SOCKET T2 22kW FREE

205.W18-U0

Wall mounting box in halogen free plastic with 1 connector Type 2 32A 400Vac 22kW with LCD display, in compliance with IEC/EN 62196-2.

Suitable for charging electric vehicles in «mode 3 case C» (mobile connector with cable) in compliance with IEC/EN 61851-1. Version for home charging in absolute safety.

Exclusive design with «dual Feel Sensitive» finish with the possibility for personalisation, made of special technopolymer highly resistant to UVA rays. High degree of protection against dust and water. Included a cable holder in anthracite technopolymer.



FEATURES

- Charge in mode 3 with pwm circuit pilot
- Current consumption metering
- Power contactor aperture monitoring
- Charge managing in case of power outage
- Working in mode stand-alone free or personal
- Predisposition for serial communication


EQUIPMENT

- 1 terminal strip 5x10mm²
- 1 current transformer
- 1 modular contactor 4P 40A 24Vdc
- 1 DC Leakage detector
- 1 fuse holder 1P+N gG 4A
- 1 power supply 24Vdc 36W
- 1 control card
- 1 lcd display 2x20 rows backlight
- 1 RBG led stripes
- 1 stop charge push-button (mode free)
- 1 cable holder in technopolymer
- 1 cable 5G6+1x0,5mm² 4m
- 1 backup battery

EXCLUDED

- 1 circuit breaker 3P+N C40 30mA ist. A
- 1 shunt trip release 24Vdc

SIZE

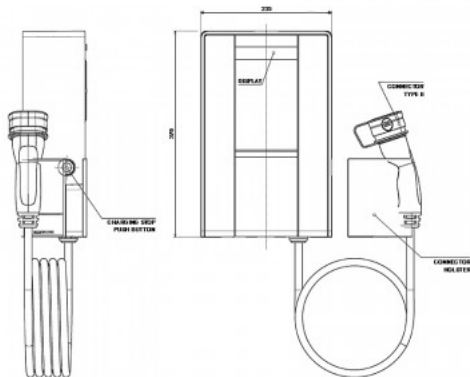

TECHNICAL SPECIFICATIONS

PROTECTION DEGREE IP	IP54
WORKING FREQUENCY	50/60Hz
MOUNTING VERSION	SURFACE MOUNTING
MATERIAL	ENGINEERING PLASTIC
GLOW WIRE	GW 650°C
PROTECTION DEGREE IK	IK08
SYNTHETICAL DESCRIPTION	WALL BOX CABLE+SOCKET T2
WITH INTEGRATED CABLE	Type 2
RATED VOLTAGE	400V

POLES	3P+N+E
RATED CURRENT	32A
EV STANDARD	Type 2 3P+N+E 32A 400V~ 22kW
WORKING TEMPERATURE	-30°C/+50°C
COLOUR	ANTHRACITE
COMMERCIAL SERIES	BE-W Series
DIMENSIONS	235x370x115mm