

PRODOTTO

PILLAR CA 2 SOCKETS WITH LOCK

204.CA23B-T2T2ME



FEATURES

- Charge in mode 3 with pwm circuit pilot
- Identification of connected cord-set size
- Protection against overcurrents and electric shock
- Protection against direct contact Safety Child Shutters
- Energy metering and current consumption
- Identification of authorized user
- Managing of lid locking and latching system
- Charge managing in case of power outage
- Working in mode stand-alone free or personal
- Predisposition for serial communication
- Interfacing with OCPP Central Station
- Wireless connection to web


SIZE

EQUIPMENT

- TFT color display
- 1 lighting head in translucent and RGB led
- 1 couple of front panels in polycarbonate
- 1 terminal strip 5x35mm²
- 1 main switch 4P 80A
- 2 circuit breakers 3P+N C40 30mA ist. A
- 2 modular contactors 4P 40A 24Vdc
- 2 DC Leakage detectors
- 1 fuse holder 1P+N gG 4A
- 1 power supply 24Vdc 60W
- 2 control cards
- 2 lcd display 2x20 rows backlight
- 2 readers RFID 13,56MHz
- 2 couples of service led
- 2 stop charge push-buttons (mode free)
- 1 local server wired with OCPP 1.6J protocol
- 1 router Wi-Fi/4G
- 1 backup battery
- 2 digital energy meters MID 3P+N 80A

TECHNICAL SPECIFICATIONS

| | |
|----------------------|------------------------------|
| PROTECTION DEGREE IP | IP54 |
| WORKING FREQUENCY | 50/60Hz |
| COLOUR | GREY |
| COMMERCIAL SERIES | LIBERA Series |
| RATED VOLTAGE | 400V |
| POLES | 3P+N+E |
| EV STANDARD | Type 2 3P+N+E 32A 400V~ 22kW |
| WORKING TEMPERATURE | -30°C/+50°C |
| PROTECTION DEGREE IK | IK10 |
| MOUNTING VERSION | ON TURRET |
| MATERIAL | VARNISHED METAL |

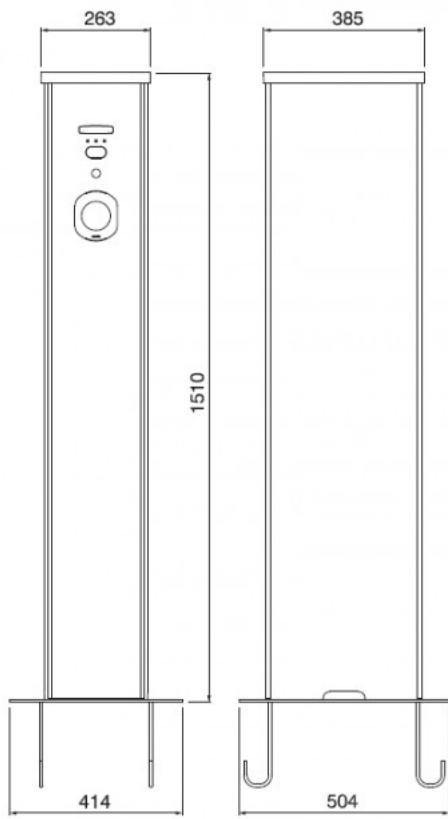

SYNTHETICAL DESCRIPTION

PILLAR CA 2 SOCKETS WITH
LOCK

DIMENSIONS

385x1510x263mm

RATED CURRENT

63A