

PRODOTTO

WALLBOX BE-W CABLE+SOCKET T2 22kW PERS.

205.W36-U0

Wall mounting box in halogen free plastic with 1 connector Type 2 32A 400Vac 22kW with cable, in compliance with IEC/EN 62196-2.

Suitable for charging electric vehicles in «mode 3» in compliance with IEC/EN 61851-1. Equipped with RFID Card reader for user identification and management.

Version for home charging in absolute safety.

Exclusive design with «dual Feel Sensitive» finish with the possibility for personalisation, made of special technopolymer highly resistant to UVA rays. High degree of protection against dust and water.

Including cable holder in anthracite technopolymer.



FEATURES

- Charge in mode 3 with pwm circuit pilot
- Energy metering and current consumption
- Identification of authorized user
- Power contactor aperture monitoring
- Charge managing in case of power outage
- Working in mode stand-alone free or personal
- Predisposition for serial communication

SIZE

EQUIPMENT


- 1 terminal strip 5x10mm²
- 1 modular contactor 4P 40A 24Vdc
- 1 DC Leakage detector
- 1 fuse holder 1P+N gG 4A
- 1 power supply 24Vdc 36W
- 1 control card
- 1 lcd display 2x20 rows backlight
- 1 reader RFID 13,56MHz
- 1 RGB led stripes
- 1 stop charge push-button (mode free)
- 1 cable holder in technopolymer
- 1 cable 5G6+1x0,5mm² 4m
- 1 backup battery
- 1 digital energy meter 3P+N 80A

EXCLUDED

- 1 circuit breaker 3P+N C40 30mA ist. A
- 1 shunt trip release 24Vdc

TECHNICAL SPECIFICATIONS

| | |
|-------------------------|--------------------------|
| PROTECTION DEGREE IP | IP54 |
| WORKING FREQUENCY | 50/60Hz |
| MOUNTING VERSION | SURFACE MOUNTING |
| MATERIAL | ENGINEERING PLASTIC |
| GLOW WIRE | GW 650°C |
| PROTECTION DEGREE IK | IK08 |
| SYNTHETICAL DESCRIPTION | WALL BOX CABLE+SOCKET T2 |
| WITH INTEGRATED CABLE | Tvne 2 |

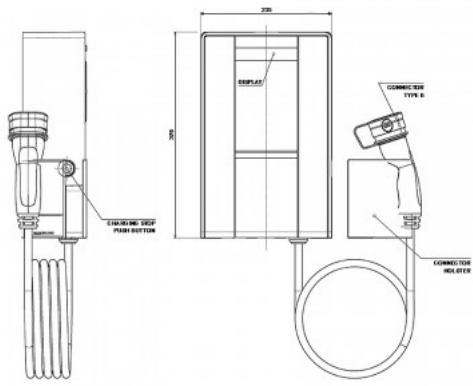

| | |
|---------------------|------------------------------|
| TYPE | type 2 |
| RATED VOLTAGE | 400V |
| POLES | 3P+N+E |
| RATED CURRENT | 32A |
| EV STANDARD | Type 2 3P+N+E 32A 400V~ 22kW |
| WORKING TEMPERATURE | -30°C/+50°C |
| COLOUR | ANTHRACITE |
| COMMERCIAL SERIES | BE-W Series |
| DIMENSIONS | 235x370x115mm |